

Circular recessed colour temperature changing downlighters

Tunable white recessed luminaires with injection moulded reflector finished white.

Applications: Offices, corridors, reception areas, toilets and retail.

- Fitted with 3000 K and 6500 K LEDs for colour temperature control
- Optional reinforcing board with centre cut aperture
- Supplied with remote gear unit fitted with 2 m supply lead
- ColourActive versions feature SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- ColourActive versions fitted with 3-pole TEE connector for LCM wiring

Notes: Emergency not available with ColourActive versions



IP40 (IP20 above ceiling)

Up to 68.3 LL/CW

LED PROTECT

Specification

| | | | |
|----------|----------|-----------|---------------------------|
| Mounting | Recessed | IP rating | IP40 (IP20 above ceiling) |
|----------|----------|-----------|---------------------------|

Lighting

| | | | |
|--------------|-------------------|----------|------------------|
| Lumen output | 965 lm - 2,050 lm | Efficacy | Up to 68.3 LL/CW |
|--------------|-------------------|----------|------------------|

Emergency data

| | | | |
|------------------------|---------|-----------------------|-----------------------------|
| Emergency lumen output | 170 lm | Emergency type | Maintained |
| Emergency duration | 3 hours | Battery specification | Nickel Metal Hydride (NiMH) |

Power

| | | | |
|-----------|-------------|---------------|-------------|
| LED power | 12 W - 24 W | Circuit power | 15 W - 30 W |
|-----------|-------------|---------------|-------------|


LED characteristics

| | | | |
|--------------------|----------------|--------------------|---------------|
| CRI | 80+ | Colour temperature | 3000 - 6500 K |
| Rated life (hours) | 60 K - L80/B10 | | |

Compliance

| | | | |
|------|-----|----|-----|
| UKCA | Yes | CE | Yes |
|------|-----|----|-----|

Dimensions

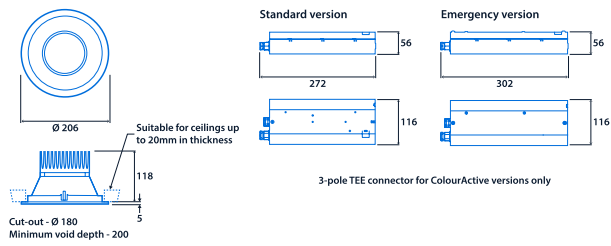

View the range



Information is correct as of 20-Dec-2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.