

Wall mounted emergency luminaires with SmartScan wireless technology

LED emergency luminaires for wall mounting with SmartScan wireless communication. Superb optical performance means fewer luminaires are required. Three hour, non-maintained emergency operation.

Applications: stairwells and corridors.

- Ideal for use in stairwell or corridor applications
- Three hour, non-maintained emergency operation
- Low power consumption (2 W total)
- Status indicator shows operational condition
- Reliable Nickel Metal Hydride (NiMH) battery technology
- Simple to install, full status reporting SmartScan wireless communication versions



IP20

0 LL/CW

SMART-SCAN

Lighting management

Emergency system	AutoTest Emergency SmartScan Emergency Standard Emergency
------------------	---

Specification

Mounting	Surface	IP rating	IP20
----------	---------	-----------	------

Emergency data

Emergency lumen output	180 lm	Emergency type	Non-maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)


Power

LED power	2 W	Circuit power	2.5 W
-----------	-----	---------------	-------

Compliance

UKCA	Yes	CE	Yes
SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724		

Dimensions

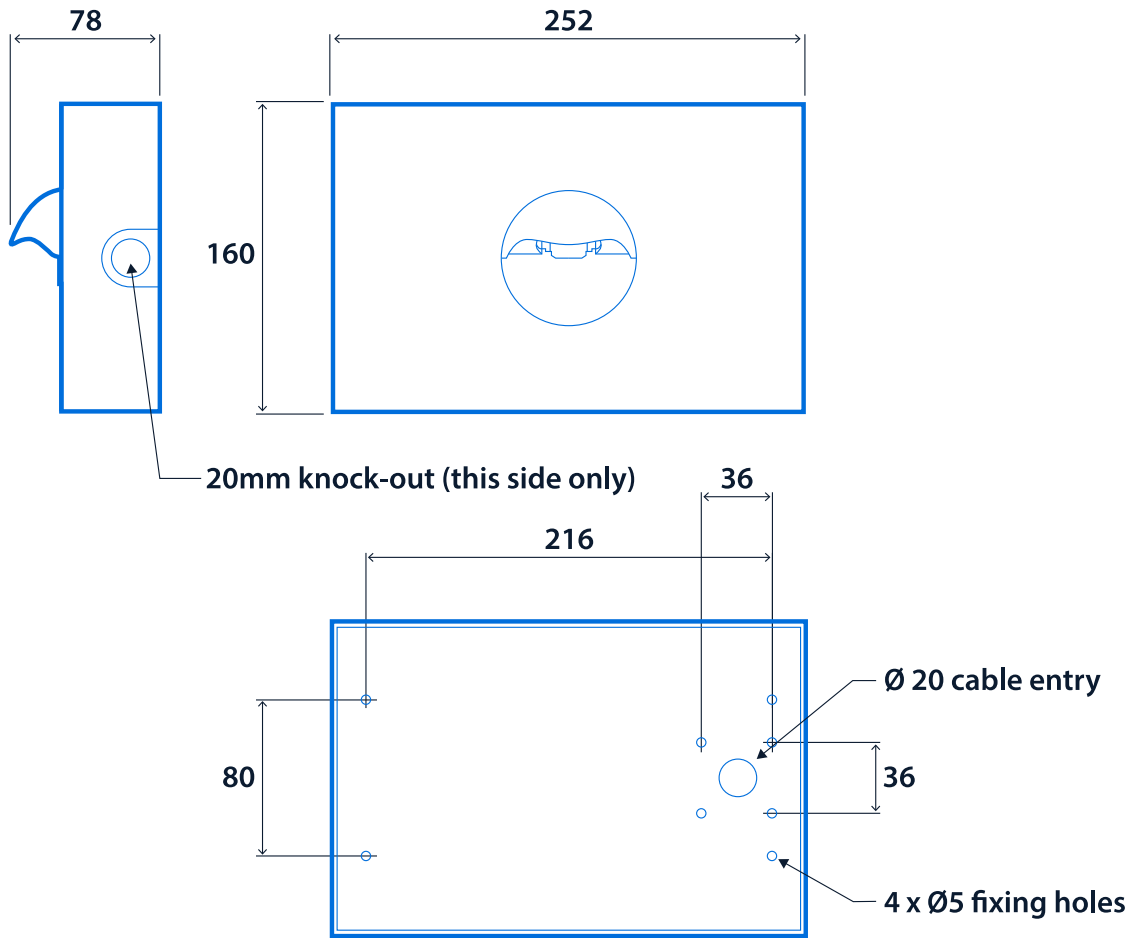

Spares

Product code	Description	Weight
EMB910	Lithium Iron Phosphate (LiFePO4) battery - End of life batteries can be returned to Thorlux for recycling	0.15 kg



View the range

