

## Anti-ligature emergency luminaires for recessed mounting with SmartScan wireless communication

Anti-ligature LED emergency luminaires for recessed mounting with SmartScan wireless communication. Secured using tamper-resistant pin Torx fixings. Discreet LED emergency luminaires with superb optical performance. Three hour, non-maintained emergency operation. Eco-Power pluggable battery reduces maintenance time and cost.

- Impact-resistant and anti-ligature
- Tamper-resistant T20 pin Torx screw fixings
- Pre-fitted 3 m lead option for connection into 6-pole or SmartScan 3-pole installations
- Low standby power consumption (1.7 W total)
- Easily replaceable Nickel Metal Hydride (NiMH) ECO-Power Pack battery
- Simple to install, full status reporting SmartScan wireless communication versions



IP65 (IP40 above ceiling) / IP20 control module

0 LL/CW



## Lighting management

Emergency system

AutoTest Emergency  
SmartScan Emergency  
Standard Emergency

## Specification

Mounting	Recessed	IP rating	IP65 (IP40 above ceiling) / IP20 control module
----------	----------	-----------	---

## Emergency data

Emergency lumen output	265 lm - 270 lm	Emergency type	Non-maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)


## Power

LED power	2 W - 3 W	Circuit power	3 W
-----------	-----------	---------------	-----


## Compliance

UKCA	Yes	CE	Yes
SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724		


## Dimensions



Hole size cut-out - Ø 98  
 Minimum void depth (when passing Control Module and ECO-Power Pack through cut-out) - 115mm

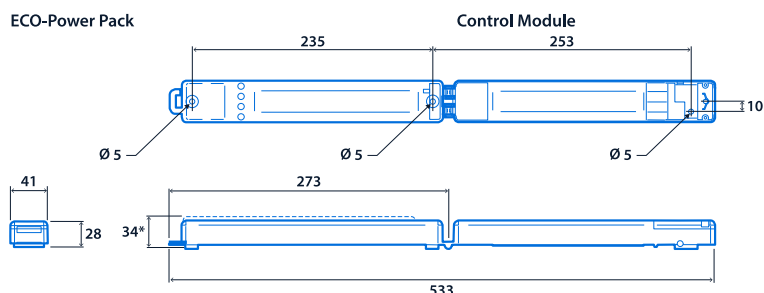

Control Module and ECO-Power Pack Combined



\* Emergency versions only


Control Module and ECO-Power Pack are articulated for easy placement through a small cut hole. The two items may be clipped on top of each other for space saving.

## Accessories

Product code	Description	Weight
SLA13101	T-bar mounting bracket - Recessed version	-
KEY16975	T20 pin Torx bit - Suitable for magnetic bit holder	-

## Spares

Product code	Description	Weight
PP17402	3 W Eco-Power Pack - End of life batteries can be returned to Thorlux for recycling	0.33 kg
PP17399	2 W Eco-Power Pack - End of life batteries can be returned to Thorlux for recycling	0.4 kg





View the  
range

