Flexbeam




Suspended narrow profile linear luminaires with acoustic attenuation

The Flexbeam is a suspended acoustic luminaire with low glare optics. Installation alongside non-luminaire acoustic baffles creates a coherent aesthetic across the ceiling. Available in 3 standard colours and reflector options to suit the space. Other colours are available on request.

Applications: Teaching spaces, Offices, Meeting rooms, Breakout areas, Reception areas and Circulation spaces.

- High performance sound absorbing, fire-retardant, polyester fibre outer body
- Choice of marble white, charcoal grey or black finish as standard.
 Other colours available to special order
- Black 'invisible' light source, metallised low glare and white reflector options
- Versions with optional uplight component
- Supplied with easily adjustable 3 m wire suspensions and fitted 3.5 m clear supply lead
- Low glare optics for EN12464-1 / LG7 (<1500cd/m² @ 65°) when using the metallised or black reflector

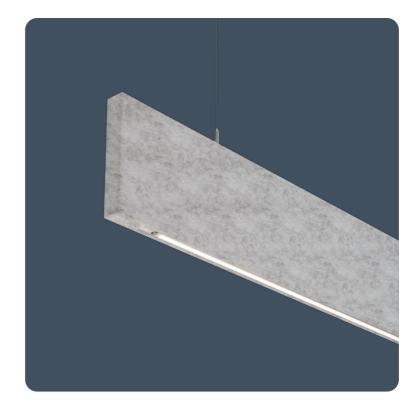

IP20

Up to 123.3 LL/CW



Specification

Mounting Suspended IP rating IP20

Max presence detection height 8 m

Lighting

Lumen output 1,850 lm - 5,580 lm Efficacy Up to 123.3 LL/CW

Emergency data

Emergency lumen output 250 lm - 350 lm Emergency type Maintained

Emergency duration 3 hours Battery specification Nickel Metal Hydride (NiMH)

Power

LED power 18 W - 45 W Circuit power 21 W - 53 W

Flexbeam



LED characteristics

CRI 80+ Colour temperature 4000 K

Rated life (hours) 100 K - L80/B10


Compliance

UKCA Yes CE Yes


Energy efficiency class This product contains a light source

of energy efficiency class B

Dimensions

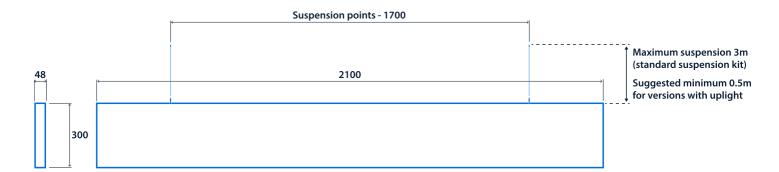













Flexbeam





Click or scan here

View Flexbeam variants using our online filtering tool



Information is correct as of 21-Jan-2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.