

Surface mounted colour temperature changing shallow profile controller luminaires

Tunable white shallow profile surface mounted luminaires with co-extruded 'Satin-Glo' polycarbonate controller.

Applications: schools, hospitals.

- Fitted with 3000 K and 6500 K LEDs for colour temperature control
- Shallow profile design
- ColourActive versions feature SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP40

Up to 102.4 LL/CW

SMARTSCAN

LUXGUARD

Lighting management

Lighting control system

ColourActive
ColourControl

Emergency system

AutoTest Emergency
Non-emergency
SmartScan Emergency
Standard Emergency

Specification

Mounting

Surface

IP rating

IP40

Nominal size

1500 mm

Lighting

Optic

Satin-Glo diffuser

Lumen output

3,480 lm - 4,175 lm

Efficacy

Up to 102.4 LL/CW

Emergency data

Emergency lumen output

520 lm

Emergency type

Maintained

Emergency duration

3 hours

Battery specification

Nickel Metal Hydride (NiMH)

Power

LED power

30 W - 37 W

Circuit power

34 W - 42 W

LED characteristics

CRI

80+

Colour temperature

3000 - 6500 K

Rated life (hours)

63 K - L80/B10

Compliance


UKCA
SmartScan wireless standards
compliance

Yes
Europe: EN 300 220-1 V2.4.1/ EN 301
489-3 V1.6.1. Australasia: ACMA 2014
Radio Communication Standard 2014.
Thorlux Patented Wireless
Technology - GB2575724

CE

Yes

Dimensions

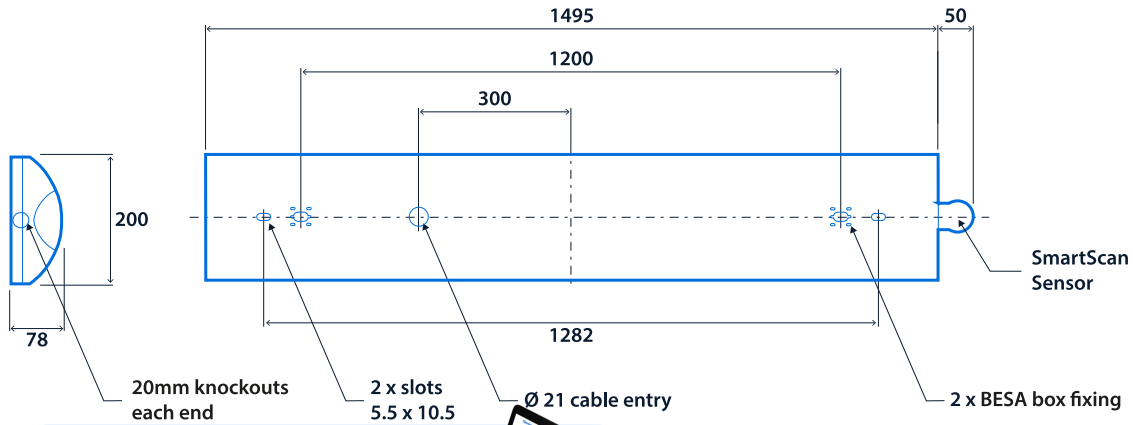

View the
range

