


LED pole top amenity luminaires

Stylish IP66 rated pole top amenity luminaire with aluminium cast body and spigot adaptor. UV stabilised clear polycarbonate cover rated IP66 and IK10. Integral high quality LED driver.

Applications: car parks, amenity areas and hospital estates.

- Integral high efficiency driver
- Extremely efficient and long system life up to 100,000 hours
- Fits 76mm columns as standard (60mm to special order)
- Photocell option

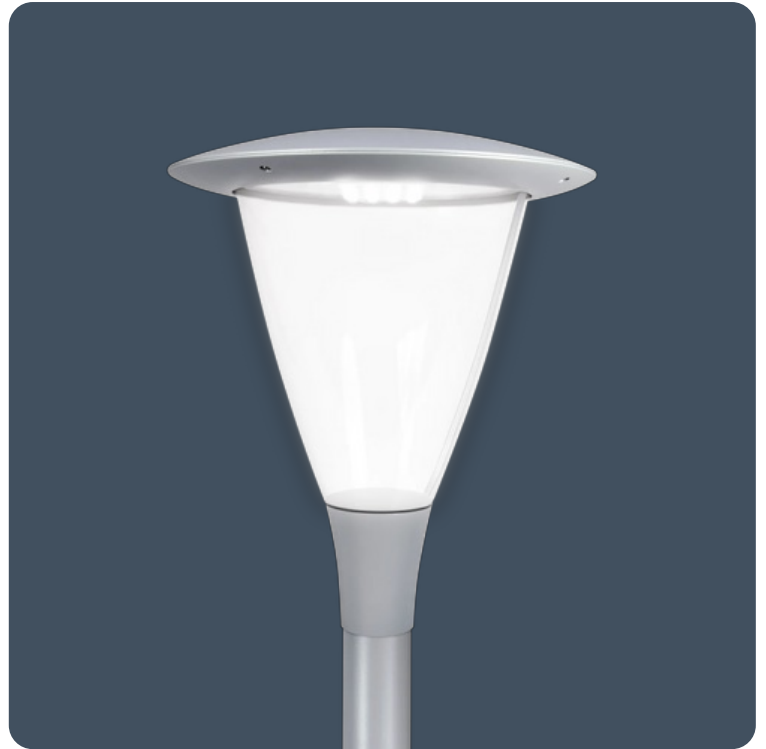

IP66

IK10

Up to 120 LL/CW

Lighting management

Lighting control system

Non-dimming

Emergency system

Non-emergency

Specification

Mounting

Column

IP rating

IP66

Impact rating

IK10

Windage rating

0.14 m²

Lighting

Optic

Clear cover

Lumen output

4,320 lm - 6,825 lm

Efficacy

Up to 120 LL/CW

Power

LED power

31 W - 52 W

Circuit power

36 W - 61 W

LED characteristics

CRI

70+

Colour temperature

4000 K

Rated life (hours)

100 K - L90/B10

Compliance


UKCA
Energy efficiency class

Yes
This product contains a light source of
energy efficiency class D

CE

Yes

Dimensions

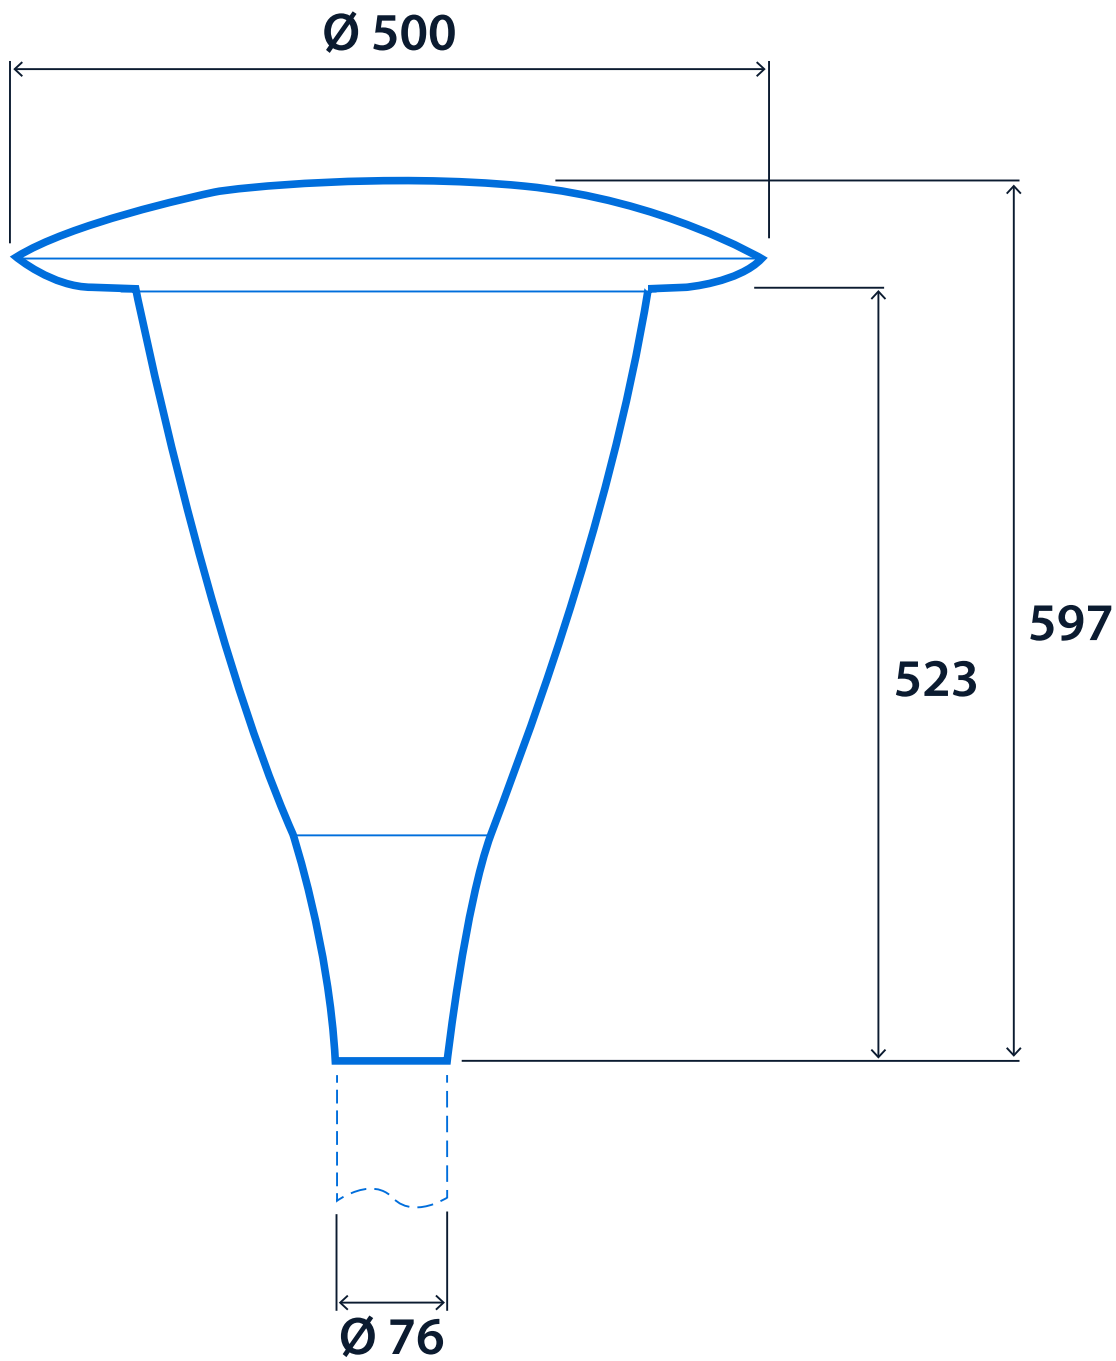

Columns

Product code	Description	Weight
FC4	4 m - Standard duty column - 76 mm shaft diameter	33 kg
FC5	5 m - Standard duty column - 76 mm shaft diameter	40 kg
FC6	6 m - Standard duty column - 76 mm shaft diameter	44 kg



View the range

