

## Recessed linear wall wash luminaires

Recessed mounted wall wash luminaires. Asymmetric light distribution ideal for illuminating vertical surfaces.

Applications: reception areas, retail, display.

- Asymmetric distribution providing uniform illumination of vertical surfaces
- Acrylic ribbed satin diffuser
- Hinged reflector for easy access to wiring terminations



IP20

Up to 92.7 LL/CW

### Specification

Mounting	Recessed	IP rating	IP20
Nominal size	600 mm 1200 mm		

### Lighting

Lumen output	1,895 lm - 4,080 lm	Efficacy	Up to 92.7 LL/CW
--------------	---------------------	----------	------------------

### Power

LED power	19 W - 38 W	Circuit power	23 W - 44 W
-----------	-------------	---------------	-------------

### LED characteristics


CRI	80+	Colour temperature	3000 K 4000 K
Rated life (hours)	60 K - L70/B10		

## Compliance


UKCA Yes CE Yes

## Dimensions

600 x 300

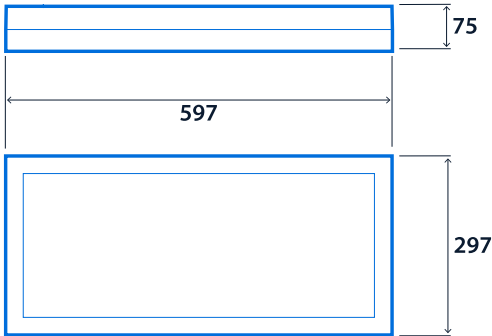

1200 x 300

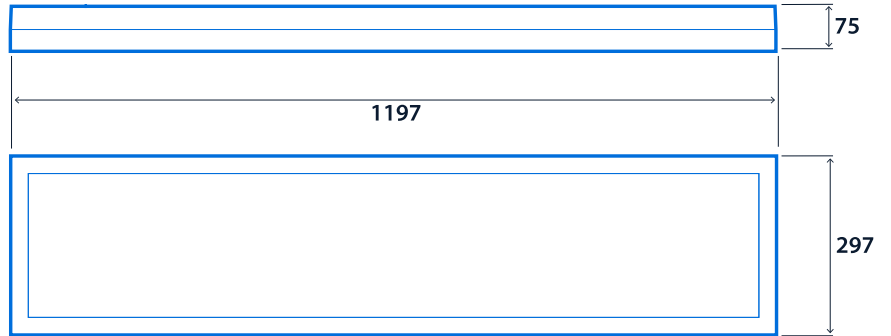

**Click or scan here**  
View Quadline variants using  
our online filtering tool



Information is correct as of 22-Jan-2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.