


Recessed LED display luminaires

Recessed mounted display luminaires. Asymmetric light distribution ideal for illuminating vertical surfaces. 17 W, 26 W and 41 W LED versions. (Formerly named Ace-T)

Applications: reception areas, retail, display.

- Asymmetric distribution providing uniform illumination of vertical surfaces
- Supplied with remote gear unit fitted with 2 m lead
- Can be supplied pre-wired with a purpose made 1 m connection lead for plugging directly into the Smart Hub

Notes: Black and silver finishes available to special order (minimum order quantity applies)

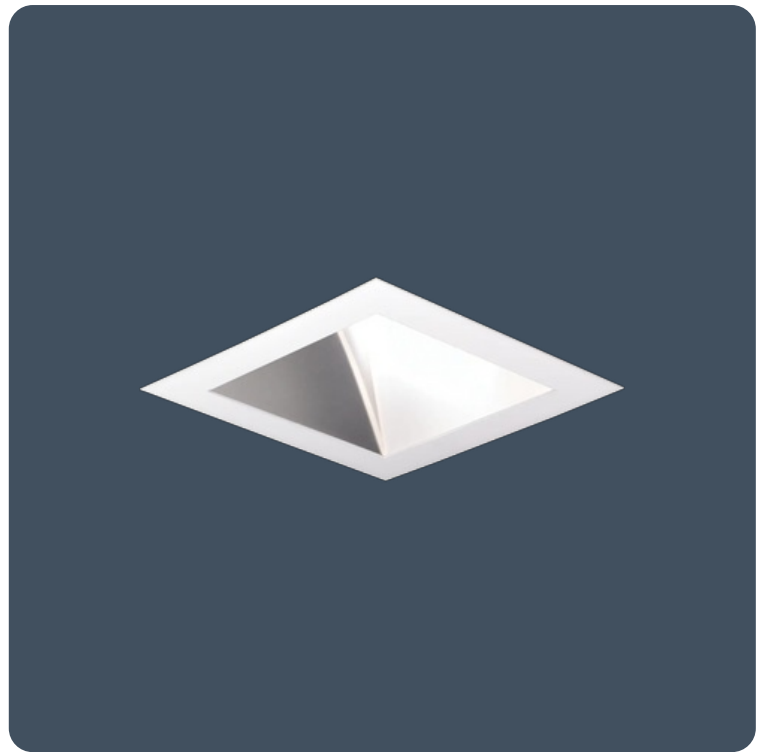

IP20

Up to 100.8 LL/CW

Lighting management

Lighting control system **Dimming (DALI)**
Non-dimming

Specification

Mounting **Recessed** IP rating **IP20**

Lighting

Lumen output **1,875 lm - 4,025 lm** Efficacy **Up to 100.8 LL/CW**

Power

LED power **17 W - 41 W** Circuit power **20 W - 47 W**

LED characteristics


CRI **80+** Colour temperature **3000 K**
4000 K

Rated life (hours) **50 K - L70/B10**

Compliance

UKCA Yes CE Yes

Dimensions

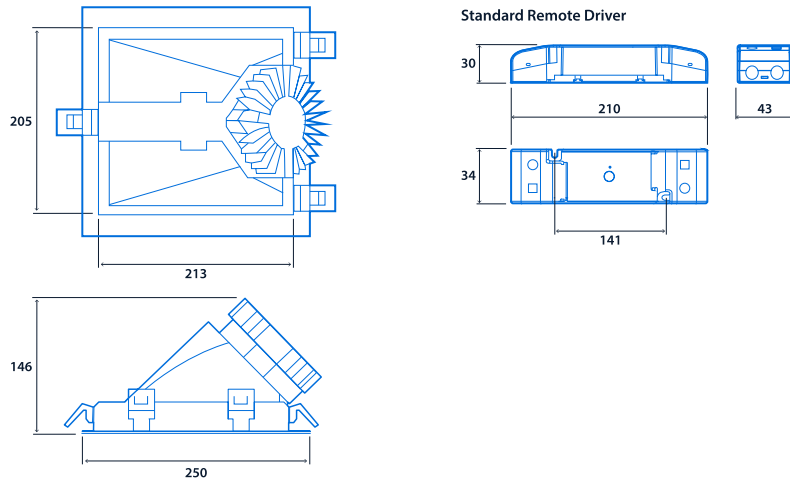

Cut-out - 230 x230
Minimum ceiling void - 200

View the range

Information is correct as of 13-Nov-2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.