

## LED area floodlights and street lights

Supremely efficient long life IP66 pole top and wall mounted LED luminaires with aluminium cast body and wiring box and polycarbonate cover. Integral high quality LED driver. Emergency, SmartScan and photocell options.

Applications: car parks, amenity areas, hospital estates, general roadway.

- Strong high pressure die-cast LM6 aluminium body with polycarbonate cover
- Area or roadway optical distributions
- Integral high efficiency driver
- Extremely efficient and long system life up to 100,000 hours
- Suitable for ambient temperatures up to 50°C
- Wide range of mounting options, including wall mounting bracket
- Photocell option
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

Notes: Emergency versions not suitable for high ambient temperatures / Glass cover versions available to special order



Up to IP66

IK10

Up to 144.5 LL/CW

SMARTSCAN

LED PROTECT

## Lighting management

Lighting control system	Non-dimming Photocell (non-dimming) SmartScan External	Emergency system	Non-emergency SmartScan Emergency
-------------------------	--	------------------	--------------------------------------

## Specification

Mounting	Column Surface	IP rating	Up to IP66
Impact rating	IK10	Max presence detection height	8 m

## Lighting

Optic Efficacy	Clear cover Up to 144.5 LL/CW	Lumen output	3,225 lm - 29,995 lm
-------------------	----------------------------------	--------------	----------------------

## Emergency data

Emergency lumen output	320 lm - 625 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

## Power

LED power	31 W - 197 W	Circuit power	35 W - 209 W
-----------	--------------	---------------	--------------


## LED characteristics

CRI	70+	Colour temperature	4000 K
Rated life (hours)	100 K - L90/B10		

## Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class C	SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724

## Dimensions

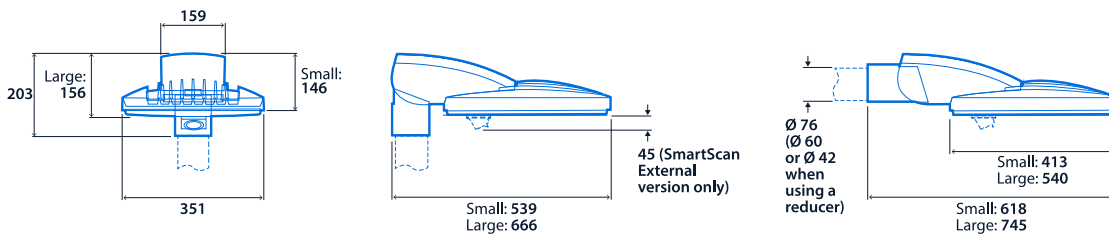

## Mounting Accessories

Product code	Description	Weight
SB15863	Single outreach arm - To fit on to 76 mm dia.	-
SB17788	Single outreach arm - To fit on to 89 mm dia.	-
SB15865	Single outreach arm - To fit on to 101 mm dia.	-
SB17180	Single outreach arm - To fit on to 114 mm dia.	-
SB15864	Twin outreach arm 180° - To fit on to 76 mm dia.	-
SB17789	Twin outreach arm 180° - To fit on to 89 mm dia.	-
SB15866	Twin outreach arm 180° - To fit on to 101 mm dia.	-
SB17181	Twin outreach arm 180° - To fit on to 114 mm dia.	-
SB15890K	Twin outreach arm 90° - To fit on to 76 mm dia. - Supplied with 2 x 76-60 mm reducer kits (SB15809)	-
SB19695K	Twin outreach arm 90° - To fit on to 89 mm dia. - Supplied with 2 x 76-60 mm reducer kits (SB15809)	-
SB15893K	Twin outreach arm 90° - To fit on to 101 mm dia. - Supplied with 2 x 76-60 mm reducer kits (SB15809)	-
SB15896K	Triple outreach arm 120° - To fit on to 89 mm dia. - Supplied with 3 x 76-60 mm reducer kits (SB15809)	-
SB15894K	Triple outreach arm 120° - To fit on to 101 mm dia. - Supplied with 3 x 76-60 mm reducer kits (SB15809)	-
SB15897K	Quad outreach arm N-S-E-W - To fit on to 89 mm dia. - Supplied with 4 x 76-60 mm reducer kits (SB15809)	-
SB15895K	Quad outreach arm N-S-E-W - To fit on to 101 mm dia. - Supplied with 4 x 76-60 mm reducer kits (SB15809)	-
POT89-76	Column adaptor - 89-76 mm - To fit on to 89 mm dia.	-
POT101-76	Column adaptor - 101-76 mm - To fit on to 101 mm dia.	-
POT114-76	Column adaptor - 114-76 mm - To fit on to 114 mm dia.	-
SB15809	Bracket arm reducer - 76-60 mm - To fit on to 60 mm bracket arm	-
SB15810	Bracket arm reducer - 76-42 mm - To fit on to 42 mm bracket arm	-
SB15808	Wall mounting bracket	-

## Single or Twin Luminaire Columns

Product code	Description	Weight
FC4	4 m - Standard duty column - 76 mm shaft diameter	33 kg
FC5	5 m - Standard duty column - 76 mm shaft diameter	40 kg
FC6	6 m - Standard duty column - 76 mm shaft diameter	44 kg
FC8	8 m - Medium duty column - 114 mm shaft diameter reduced at top to 101 mm	100 kg
FC10	10 m - Medium duty column - 114 mm shaft diameter reduced at top to 101 mm	142 kg

## Triple or Quad Luminaire Columns

Product code	Description	Weight
FC4/89	4 m - Medium duty column - 89 mm shaft diameter	60 kg
FC5/89	5 m - Medium duty column - 89 mm shaft diameter	64 kg
FC6/89	6 m - Medium duty column - 89 mm shaft diameter	68 kg
FC8	8 m - Medium duty column - 114 mm shaft diameter reduced at top to 101 mm	100 kg
FC10	10 m - Medium duty column - 114 mm shaft diameter reduced at top to 101 mm	142 kg



View the  
range

